


The DP series of vacuum pad attachments are suitable for handling heavy, rigid to semi-rigid loads. They feature rugged deep lipped rubber sealing rings that are bolted on between two metal plates to handle heavier loads with security.

Note: Not for use on thin materials.

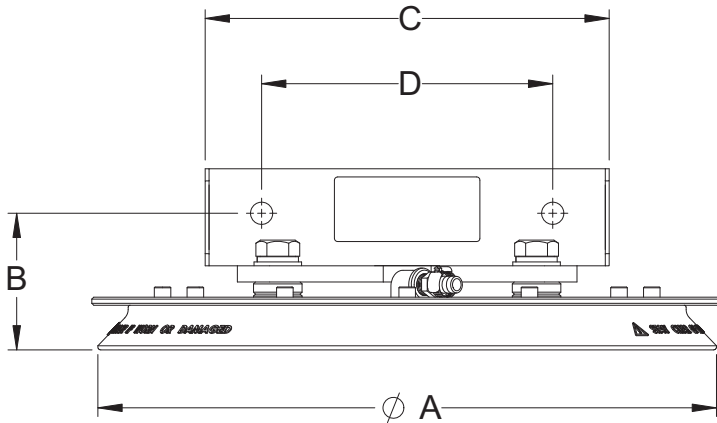

Pad Attachment No.	PA145-S-3	PA155-S-3	PA185-S-3	PA195-S-3	PA215-S-3	PA235-S-36
Rated Load Capacity w/ M150M [lbs (kg)]	750 (340)	1000 (454)	1300 (590)	1550 (703)	1800 (816)	N/A
Rated Load Capacity w/ VPFL4, VPF57 or VPE1-FD [lbs (kg)]	750 (340)	1000 (454)	1300 (590)	1550 (703)	2000 (907)	N/A
Rated Load Capacity w/ VPF-57HD or VPE1-HD [lbs (kg)]	N/A	N/A	N/A	N/A	N/A	2300 (1043)
Rated Load Capacity w/ VPE3 [lbs (kg)]	N/A	N/A	N/A	N/A	N/A	2300 (1043)
Unit Weight [lbs (kg)]	46 (21)	50 (23)	62 (28)	68 (31)	80 (36)	95 (43)
A Pad Diameter [in. (mm)]	14.5 (368)	17.25 (438)	18.5 (470)	19.5 (495)	22 (559)	24 (610)
B Pad Attachment Headroom [in. (mm)]	4 (102)	6 (152)	4.5 (114)	4.5 (114)	4.5 (114)	6 (152)
C Beam Length [in. (mm)]	11.5 (292)	12.25 (311)	12.5 (318)	12.5 (318)	12.5 (318)	16 (406)
D Hardware Mounting Centers [in. (mm)]	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)
D Alternate Hardware Mtg. Centers [in. (mm)]	N/A	N/A	N/A	N/A	N/A	12 (305)
Replacement Vacuum Seal No.	SR-145M	SR-155M	SR-185M	SR-195M	SR-215M	SR-235M