




ANVER Vacuum Lifters can be outfitted with a variety of Interchangeable Vacuum Pads and Vacuum Lifting Attachments for a wide range of material handling applications. Various multiple vacuum pad configurations can be installed on most of our standard vacuum generators. The below Vacuum Lifting Pad Attachments feature ANVER's proprietary SSR Series of Hand Replaceable Slip-On Vacuum Sealing Rings. With SSR Sealing Rings, ANVER Vacuum Lifters are more economical to operate as the vacuum seals can easily be replaced in minutes with no tools required for removal or installation. ANVER SSR Sealing Rings also feature a short lip design for rapid vacuum attachment and release.

NOTE: Not compatible with EZ-Tilt-(Series) attachments.

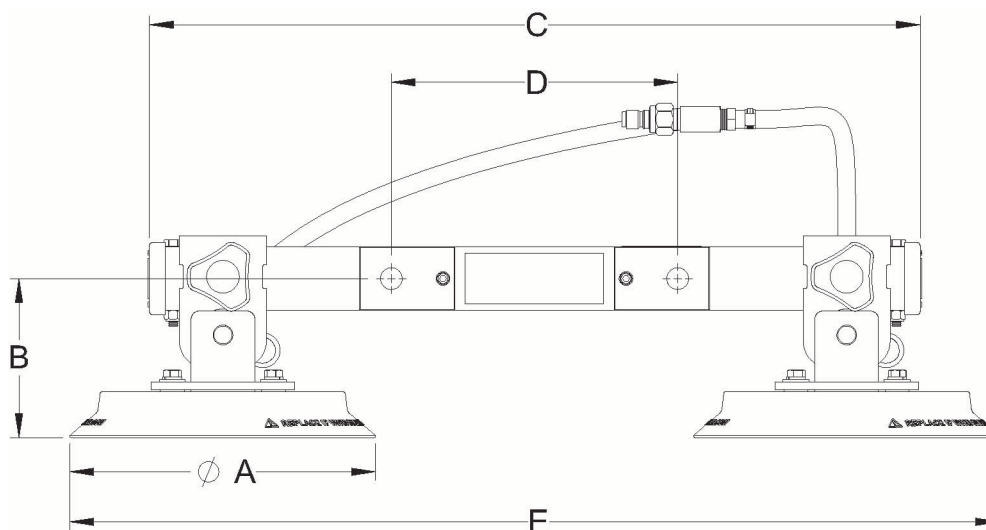

Model Number	PA62-2-24-3	PA62-2-36-3	PA66-2-24-3	PA66-2-36-3	PA72-2-24-3	PA72-2-36-3	PA76-2-24-3	PA76-2-36-3
Rated Load Capacity [lbs (kg)]	220 (110)	220 (110)	220 (110)	220 (110)	320 (145)	320 (145)	320 (145)	320 (145)
Unit Weight [lbs (kg)]	18 (8)	22 (10)	18 (8)	22 (10)	20 (9)	24 (11)	20 (9)	24 (11)
A Pad Diameter [in. (mm)]	6.0 (165)	6.0 (165)	6.63 (168)	6.63 (168)	7.0 (178)	7.0 (178)	7.75 (197)	7.75 (197)
B Headroom [in. (mm)]	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)
C Beam Length [in. (mm)]	24 (610)	36 (914)	24 (610)	36 (914)	24 (610)	36 (914)	24 (610)	36 (914)
D Hardware Mounting Centers [in. (mm)]	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)
E Pad Distance Maximum [in. (mm)]	25.69 (652)	37.50 (953)	26.25 (666)	38.25 (971)	26.63 (676)	38.63 (981)	27.38 (695)	39.38 (1000)
E Pad Distance Minimum [in. (mm)]	19.50 (495)	19.50 (495)	20.13 (512)	20.13 (512)	20.50 (520)	20.50 (520)	21.25 (540)	21.25 (540)
Slip-On Seal Part Number	SSR-62	SSR-62	SSR-66	SSR-66	SSR-72	SSR-72	SSR-76	SSR-76

Model Number	PA82-2-24-3	PA82-2-36-3	PA86-2-24-3	PA86-2-36-3	PA92-2-24-3	PA92-2-36-3	PA96-2-24-3	PA96-2-36-3
Rated Load Capacity [lbs (kg)]	440 (200)	440 (200)	440 (200)	440 (200)	550 (249)	550 (249)	550 (249)	550 (249)
Unit Weight [lbs (kg)]	22 (10)	26 (12)	22 (10)	26 (12)	24 (11)	28 (13)	24 (11)	28 (13)
A Pad Diameter [in. (mm)]	8 (203)	8 (203)	8.81 (224)	8.81 (224)	9.13 (232)	9.13 (232)	10 (254)	10 (254)
B Headroom [in. (mm)]	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)	5 (127)
C Beam Length [in. (mm)]	24 (610)	36 (914)	24 (610)	36 (914)	24 (610)	36 (914)	24 (610)	36 (914)
D Hardware Mounting Centers [in. (mm)]	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)
E Pad Distance Maximum [in. (mm)]	27.63 (702)	39.63 (1006)	28.44 (722)	40.44 (1027)	28.75 (730)	40.75 (1035)	29.63 (752)	41.63 (1057)
E Pad Distance Minimum [in. (mm)]	21.50 (546)	21.50 (546)	22.31 (567)	22.31 (567)	22.63 (575)	22.63 (575)	23.50 (597)	23.50 (597)
Slip-On Seal Part Number	SSR-82	SSR-82	SSR-86	SSR-86	SSR-92	SSR-92	SSR-96	SSR-96