




ANVER Vacuum Lifters can be outfitted with a variety of Interchangeable Vacuum Pads and Vacuum Lifting Attachments for a wide range of material handling applications. Various single and multiple vacuum pad configurations can be installed on most of our standard vacuum generators. The below Vacuum Lifting Pad Attachments feature ANVER's proprietary rectangular vacuum cups with soft, long lips and deep profile are specifically designed for handling flat, rigid materials such as sheet and plate. They are also excellent for wood, composites, curved panels, stone and other materials. They feature a excellent, versatile design for most applications.

NOTE: Any pad attachments used with EZ-Tilt-(Series) vertical attachments MUST USE Vertical Capacity listed.

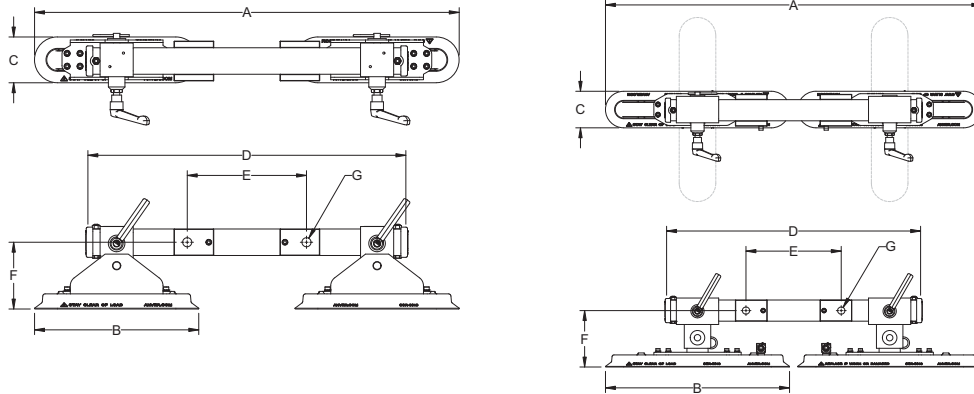

Model Number	PA3513-2-24-3	PA3513-2-36-3	PA3518-2-24-3	PA3518-2-36-3	PA4512-2-24-3	PA4512-2-36-3	PA4518-2-24-3	PA4518-2-36-3	PA5518-2-36-3	PA5518-2-48-3
Rated Load Capacity [lbs (kg)]	320 (145)	320 (145)	490 (222)	490 (222)	460 (209)	460 (209)	670 (304)	670 (304)	900 (408)	900 (408)
Unit Weight [lbs (kg)]	24 (11)	29 (13)	27 (12)	32 (15)	25 (11)	30 (14)	27 (12)	32 (15)	T.B.D.	T.B.D.
A Pads In-Line Outside Max. [in. (mm)]	32 (813)	44 (1118)	36 (914)	48 (1219)	32 (813)	44 (1118)	36 (914)	48 (1219)	47 (1194)	59 ()
A Pads In-Line Outside Min. [in. (mm)]	26 (660)	26 (660)	36 (914)	36 (914)	26 (660)	26 (660)	36 (914)	36 (914)	37 (940)	37 (940)
A Pads Perpendicular Outside Max. [in. (mm)]	N/A	N/A	22 (559)	34 (864)	N/A	N/A	23 (584)	35 (889)	35 (889)	47 (1194)
A Pads Perpendicular Outside Min. [in. (mm)]	N/A	N/A	19 (483)	19 (483)	N/A	N/A	20 (508)	20 (508)	25 (635)	25 (635)
B Pad Length [in. (mm)]	12.69 (322)	12.69 (322)	17.75 (451)	17.75 (451)	12 (305)	12 (305)	17.94 (456)	17.94 (456)	18 (457)	18 (457)
C Pad Width [in. (mm)]	3.69 (94)	3.69 (94)	3.69 (94)	3.69 (94)	4.88 (124)	4.88 (124)	4.81 (122)	4.81 (122)	5.88 (149)	5.88 (149)
D Beam Length [in. (mm)]	24 (610)	36 (914)	24 (610)	36 (914)	24 (610)	36 (914)	24 (610)	36 (914)	38 (965)	50 (1270)
E Hardware Mounting Centers [in. (mm)]	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)	9 (229)
F Headroom [in. (mm)]	5 (127)	5 (127)	5.3 (135)	5.3 (135)	5 (127)	5 (127)	5.3 (135)	5.3 (135)	6 (152)	6 (152)
G Mounting Hole Diameter [in. (mm)]	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)	0.69 (17)