






ANVER vacuum filters range in size from 1/4" to 1-1/2" NPT and are constructed from FDA approved black nylon. If space permits, use of the longer size bowl will require fewer element changes. These are for use with vacuum pumps and vacuum systems. They are 100% airtight, even after repeated element changes; you can easily see when the element needs changing; they do not corrode or rust; and the element works well even on fine dust.

These filters are used to protect valves, pumps, ejectors, etc., from dust and other harmful particles. In-line filters are designed to be serviced without removing the entire unit from the line. You can simply remove the bowl by hand and clean or change the filter element. The transparent nylon bowl allows you to easily monitor the filter condition.

Features:

- Vacuum Filters are designed for years of reliable, leak-proof use
- FDA approved Black Nylon Body is corrosion and rust proof, and shock-proof
- Buna-N Gasket seals the bowl to the housing
- 70-140 micron polyethylene filter element
- Transparent nylon bowl shows condition of filter
- Pressure rating from full vacuum to 100 psi. Sharp pressure spikes are not recommended.
- Maximum temperature 125° F (52° C) at 100 psi

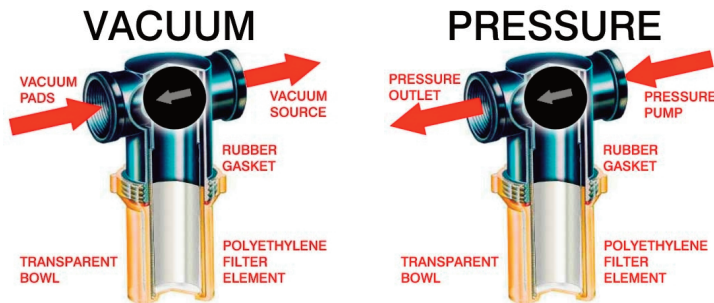

© ANVER Corp. www.anver.com

© ANVER Corp. www.anver.com

Part Number	P-Style Filter (Element)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	Filter Area in. ² (cm ²)	Pipe Thread (NPT)	Standard Element	Special Order Element	Filter O-Ring Gasket	Filter Clear Bowl
FLTP-1/8F	PPSF.125-X10 (PPX10RE3)	3.1 (78.7)	2.4 (61)	1.9 (48.3)	2 (50.8)	4.27 (28)	1/8" NPT Female	FLTPE-1 70-140 micron	N/A	FLTP-10497	FLTPB-1
FLTP-1/4M	N/A	3.1 (78.7)	2.4 (61)	1.9 (48.3)	2 (50.8)	4.27 (28)	1/4" NPT Male	FLTPE-1 70-140 micron	N/A	FLTP-10497	FLTPB-1
FLTP-1/4F	PPSF.25-X10 (PPX10RE3)	3.1 (78.7)	2.4 (61)	1.9 (48.3)	2 (50.8)	4.27 (28)	1/4" NPT Female	FLTPE-1 70-140 micron	N/A	FLTP-10497	FLTPB-1
FLTP-3/8M	N/A	3.1 (78.7)	2.4 (61)	1.9 (48.3)	2 (50.8)	4.27 (28)	3/8" NPT Male	FLTPE-1 70-140 micron	N/A	FLTP-10497	FLTPB-1
FLTP-3/8FS	PPSF.375-X10 (PPX10RE3)	3.1 (78.7)	2.4 (61)	1.9 (48.3)	2 (50.8)	4.27 (28)	3/8" NPT Female	FLTPE-1 70-140 micron	N/A	FLTP-10497	FLTPB-1
FLTP-3/8F	N/A	3.6 (91.4)	5.1 (129.5)	2.9 (73.6)	4.4 (111.8)	19 (123)	3/8" NPT Female	FLTPE-2 70-140 micron	FLTPE-2B 150-200 micron	FLTP-10514	FLTPB-2
FLTP-1/2F	PPSF.5-X35 (PPX35RE3)	3.6 (91.4)	5.1 (129.5)	2.9 (73.6)	4.4 (111.8)	19 (123)	1/2" NPT Female	FLTPE-2 70-140 micron	FLTPE-2B 150-200 micron	FLTP-10514	FLTPB-2
FLTP-1/2F-F	PPSF.5-X35 (PPX35RE3)	3.6 (91.4)	5.1 (129.5)	2.9 (73.6)	4.4 (111.8)	19 (123)	1/2" NPT Female	FLTPE-2F 70-140 micron w/ Felt Element	N/A	FLTP-10514	FLTPB-2
FLTP-3/4F	PPSF.75-X35 (PPX35RE3)	3.6 (91.4)	5.4 (137.2)	2.9 (73.6)	4.6 (116.9)	19 (123)	3/4" NPT Female	FLTPE-2 70-140 micron	FLTPE-2B 150-200 micron	FLTP-10514	FLTPB-2
FLTP-1F	PPSF1.0-X50 PPX50RE3	4.9 (124.5)	6.4 (162.6)	4 (101.6)	5.6 (142.2)	33 (213)	1" NPT Female	FLTPE-3 70-140 micron	N/A	FLTP-10538	FLTPB-3
FLTP-1F/15	N/A	4.9 (124.5)	6.4 (162.6)	4 (101.6)	5.6 (142.2)	33 (213)	1" NPT Female	FLTPE-3/15	N/A	N/A	N/A
FLTP-1.5F/15	N/A	5.2 (132.1)	8.1 (209.9)	4 (101.6)	6.9 (175.3)	39 (252)	1-1/2" NPT Female	FLTPE-4/15	N/A	N/A	N/A