





ANVER's VP Series rectangular vacuum pads are also available for use with our rigid or ball swivel suspensions. These cups have been designed using our 30+ years of experience in the vacuum handling field making them some of the most versatile and economical vacuum cups we offer.

Features:


- Easy-to-install replacement slip-on seals make maintenance simple and economical.
- Short lip seals attach quickly and evenly.
- Standard Ball Swivel or Rigid Mounting on all pads.
- Cleated bottom maximizes capacity – excellent for both horizontal and vertical loads.
- The standard materials are Nitrile (NBR).

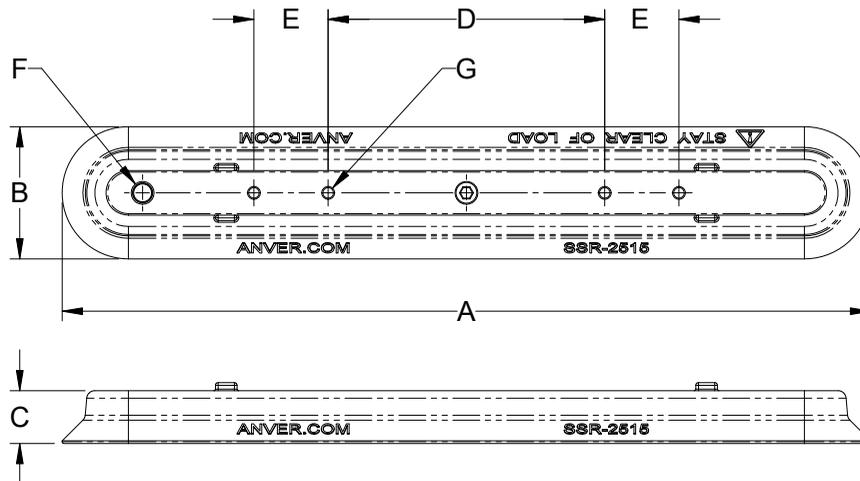

Part Number	VP2515-NBR
Replacement Seal Number	SSR-2515
Horizontal Rated Load (Flat) lb. (kg)	140 (63.5)
Vertical Rated Load (Horizontal Cylindrical) lb. (kg)	70 (31.7)
Minimum Load Radius in. (mm)	4 (101)
A in. (mm)	15.25 (387)
B in. (mm)	2.75 (70)
C in. (mm)	0.98 (25)
D in. (mm)	5.13 (130)
E in. (mm)	1.38 (35)
F in. (mm)	M6x1.0
G Port Size	1/8" NPT
Weight lb. (kg)	1.06 (0.48)

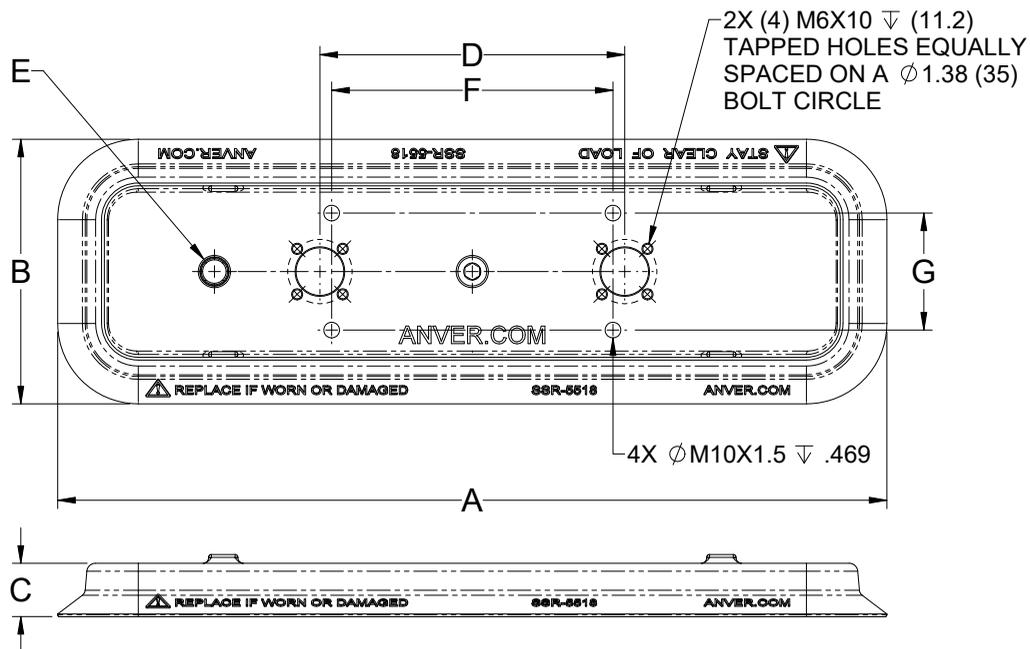

Part Number	VP3513-NBR	VP3518-NBR	VP4512-NBR	VP4512-NBR-BL	VP4518-NBR	VP5518-NBR	VP6520-NBR
Horizontal Rated Load (Flat) lb. (kg)	160 (73)	245 (111)	230 (104)	230 (104)	335 (152)	450 (204)	550 (249)
Vertical Rated Load (Horizontal Cylindrical) lb. (kg)	80 (36)	122 (55)	115 (52)	115 (52)	167 (76)	225 (102)	275 (125)
Minimum Load Radius in. (mm)	8 (203)	8 (203)	21.5 (546)	21.5 (546)	13 (330)	39 (991)	37 (940)
A in. (mm)	12.69 (322)	17.75 (451)	12 (305)	12 (305)	17.94 (456)	18 (457)	20.13 (511)
B in. (mm)	3.69 (94)	3.69 (94)	4.88 (124)	4.88 (124)	4.81 (122)	5.88 (149)	6.88 (175)
C in. (mm)	1.14 (29)	1.14 (29)	1.14 (29)	1.14 (29)	1.14 (29)	1.14 (29)	1.14 (29)
D in. (mm)	6.5 (165)	6.5 (165)	6.5 (165)	N/A	6.5 (165)	6.5 (165)	6.5 (165)
E Port Size	3/8" NPT	3/8" NPT	3/8" NPT	N/A	3/8" NPT	3/8" NPT	3/8" NPT
F in. (mm)	N/A	N/A	N/A	N/A	N/A	6 -152	6 -152
G in. (mm)	N/A	N/A	N/A	N/A	N/A	2.5 -63.5	2.5 -63.5
Weight lb. (kg)	1.4 (0.6)	2.1 (1.0)	2.13 (1.0)	2.13 (1.0)	3.2 (1.5)	4.54 (2.1)	6.3 (2.9)

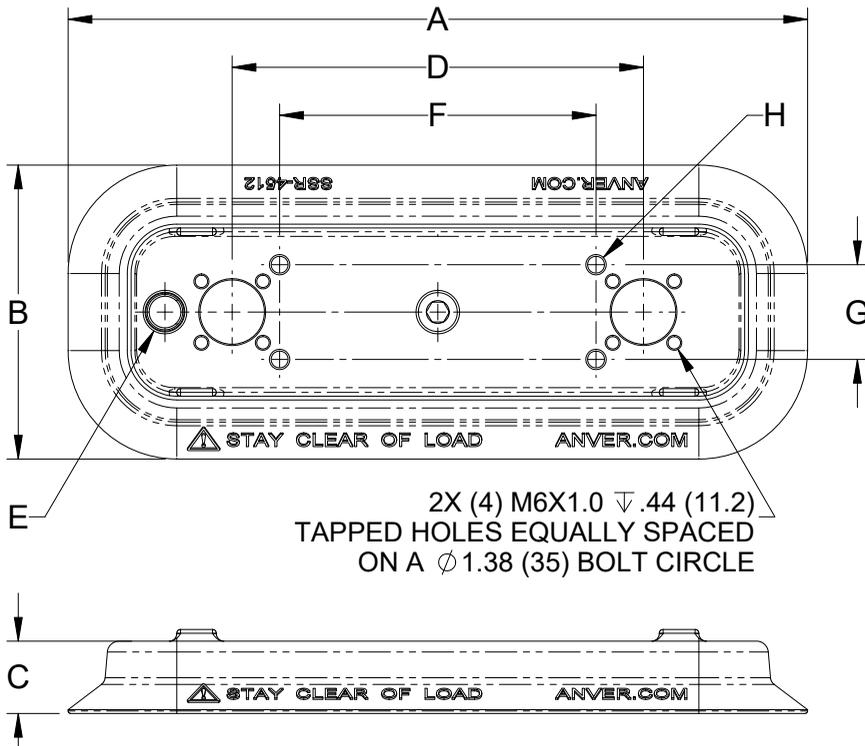

Part Number	VP4512R-NBR
Replacement Seal Number	SSR-4512 & 24000258
Horizontal Rated Load (Flat) lb. (kg)	230 (104)
Vertical Rated Load (Horizontal Cylindrical) lb. (kg)	115 (52)
Minimum Load Radius in. (mm)	21.5 (546)
A in. (mm)	12 (305)
B in. (mm)	4.88 (124)
C in. (mm)	1.14 (29)
D in. (mm)	6.5 (165)
E Port Size	3/8" NPT
Weight lb. (kg)	2.13 (1)