




APU-101 Air-Powered Vacuum Pick-Up Unit's are low cost, compact, require little maintenance, and feature quality Venturi vacuum generators. A vacuum check valve maintains vacuum in case of power failure. The unit will hold vacuum per ASME Standard B30.2 for vacuum lifting devices on clean, smooth, non-porous material allowing the operator to put down the load safely. A vacuum release/blow-off valve ensures a quick and consistent attach and release for high production usage. Air supply must be clean, dry, and regulated.

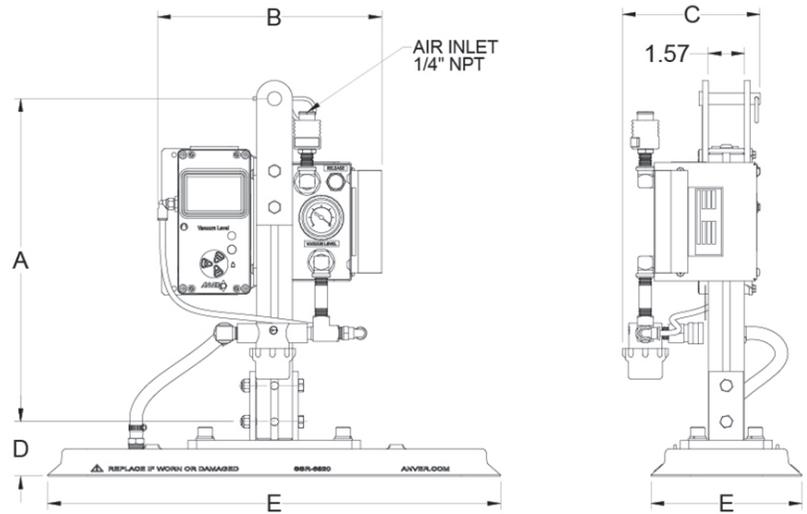


Lifting Frame Specifications

Lift Frame Model Number	APU-101	APU-101-WH
Rated Load lb (kg)	500 (227)	500 (227)
Vacuum Generator Model Number	AL101	AL101
Headroom A In. (mm)	14 (356)	14 (356)
Width B In. (mm)	9.75 (248)	9.75 (248)
Depth C In. (mm)	6 (153)	10.6 (269)
Weight lb (kg)	8 (3.6)	10 (4.5)

Available Pad Attachments

Pad Attachment Part Number	PS86B-NBR	PS6520B-NBR
Horizontal Rated Load (Flat) lb. (kg)	220 (100)	500 (227)
Horizontal Rated Load (Cylindrical) lb. (kg)	N/A	250 (113)
Minimum Load Radius in. (mm)	N/A	36 (915)
Height D In. (mm)	2.4 (61)	2.4 (61)
Pad Size E In. (mm)	8.81 Dia. (224)	20.13 (511) x 6.88 (175)
Weight lbs. (kg)	5 (2.3)	11 (5.0)

APU-MTY Air-Powered Vacuum Pick-Up Unit's are low cost, compact, require little maintenance, and feature quality Venturi vacuum generators. A vacuum check valve maintains vacuum in case of power failure. The unit will hold vacuum per ASME Standard B30.2 for vacuum lifting devices on clean, smooth, non-porous material allowing the operator to put down the load safely. A vacuum release/blow-off valve ensures a quick and consistent attach and release for high production usage. Air supply must be clean, dry, and regulated.

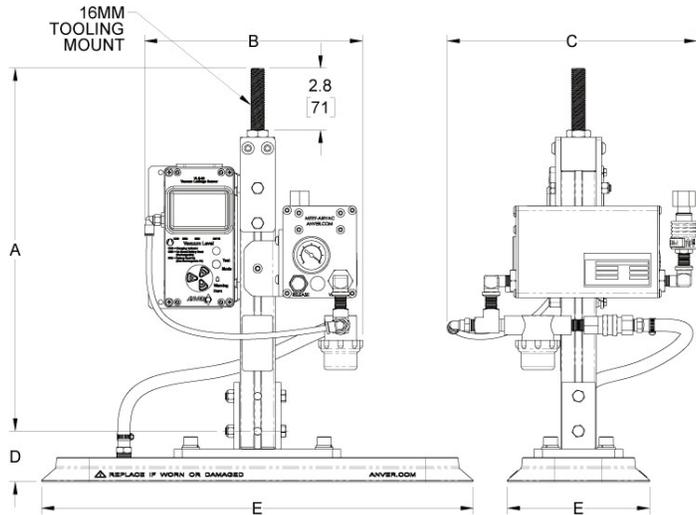

Lifting Frame Specifications

Lift Frame Model Number	APU-MTY-25-16TM
Rated Load lb.(kg)	500 (227)
Vacuum Generator Model Number	MTY-2-25-FB
Headroom A In. (mm)	16.3 (414)
Width B In. (mm)	10 (254)
Depth C In. (mm)	11.31 (288)
Weight lbs. (kg)	10.5 (267)

Available Pad Attachments

Pad Attachment Part Number	PS86B-NBR	PS6520B-NBR
Horizontal Rated Load (Flat) lb. (kg)	220 (100)	500 (227)
Horizontal Rated Load (Cylindrical) lb. (kg)	N/A	250 (113)
Minimum Load Radius in. (mm)	N/A	36 (915)
Height D In. (mm)	2.4 (61)	2.4 (61)
Pad Size E In. (mm)	8.81 Dia. (224)	20.13 (511) x 6.88 (175)
Weight lbs. (kg)	5 (2.3)	11 (5.0)