




ANVER'S High Flow Vacuum Lifters offer efficient material handling solutions by promoting functionality, safety, and ergonomic operations for a wide variety of porous materials. High Flow lifting frames are built to order from stock using modular components, so there are hundreds of possible combinations depending on the vacuum generator, beam, crossarms, and foam vacuum cups selected.

Basic features on ANVER's High Flow Horizontal Vacuum Lifters include: attach/release controls mounted on the generator handlebar; and locking hand knobs on the adjustable vacuum pad, slide assemblies, and crossarms (when applicable).

ANVER High-Flow lifters are specialized to only lift porous panel materials and using these lifters requires workers to always be well clear of loads. These types of lifters are exempt from ANSI spec's because they can not hold vacuum as air passes through the material.

The L50M2-61FP-HF, -86FP-HF, and -110FP-HF two pad lifting frames are ideal for handling particle board and plywood sheets with a capacity up to 500 lb (227 kg).


*Lifting frame shown with vacuum generator and/or optional accessories, not included.



Vacuum pads in fully extended position to handle maximum plate size.



Vacuum pads moved inwards to handle shorter plate.

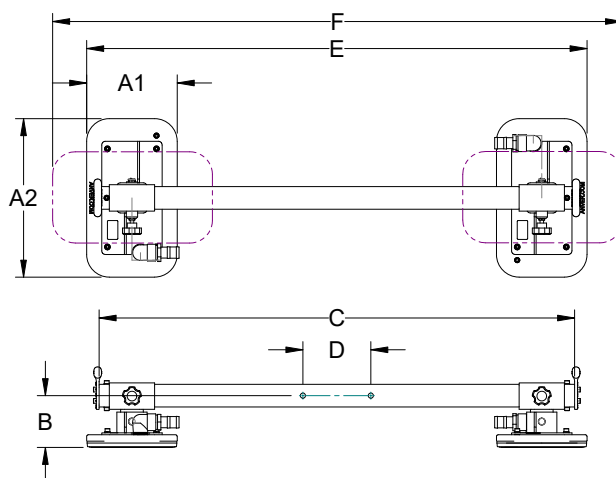

Lifting Frame Number	L50M2-61FP-HF	L50M2-86FP-HF	L50M2-110FP-HF
Rated Load Capacity [lbs (kg)]	500 (227)	500 (227)	500 (227)
Unit Weight [lbs (kg)]	135 (62)	150 (68)	164 (75)
A Pad Size [in. (mm)]	12 x 21 (305 x 534)	12 x 21 (305 x 534)	12 x 21 (305 x 534)
B Lifting Frame Headroom [in. (mm)]	6.9 (175)	6.9 (175)	6.9 (175)
C Beam Length [in. (mm)]	63 (1600)	88 (2235)	112 (2845)
D Hardware Mounting Centers [in. (mm)]	9 (229)	9 (229)	9 (229)
E Pad Distances Maximum [in. (mm)]	66 (1676)	91 (2311)	115 (2921)
E Pad Distances Minimum [in. (mm)]	34 (864)	34 (864)	34 (864)
F Pad Distances Maximum [in. (mm)]	75 (1905)	100 (2540)	124 (3149)
F Pad Distances Minimum [in. (mm)]	43 (1093)	43 (1093)	43 (1093)
Maximum Sheet Size [ft (M)]	8 x 6 (2.4 x 1.8)	10 x 6 (3.0 x 1.8)	12 x 6 (3.7 x 1.8)
Seal Number	FR120210	FR120210	FR120210

NOTE: When used with VPHF-(Series) High Flow Generators, 230/460/575V, 3 Phase power is required.